

C10P

Stratus Pro Asymmetric & Symmetric 2-in-1 Clear
Floor Direct Drive 10,000 LBS Capacity Single
Point Manual Release Car Lift SAE-C10P



STRATUS
auto equipment®

Sales & Showroom

512-640-9896

5881 Imperial Loop Dr.

College Station, TX 77845

sales@stratusautoequip.com

WWW.STRATUSAUTOEQUIP.COM

TECHNICAL

Model	C10P - Symmetrical
Capacity	10,000 LBS
Max Lifting Height with Adaptors	81 7/8" (2080 MM)
Min Lifting Height with Adaptors	5 1/8" (130 MM)
Max Lifting without Adaptors	76 3/4" (1950 MM)
Min Lifting without Adaptors	3 3/4" (95 MM)
Rise Time	~50SEC
Max Lifting Height with Adaptors	81 7/8" (2080 MM)
Min Lifting Height with Adaptors	5 1/8" (130 MM)
Max Lifting without Adaptors	76 3/4" (1950 MM)
Min Lifting without Adaptors	3 3/4" (95 MM)
Rise Time	~50SEC

Front Arm Reach Max	53 1/8" (1350 MM)
Front Arm Reach Min	33 7/16" (850 MM)
Rear Arm Reach Max	42 1/8" (1070 MM)
Rear Arm Reach Min	27 9/16" (700 MM)
Motor	3 HP, 220V, 60 HZ, 1ph
Oil	AW32 or AW46
Breaker	30A
Overall Height	151" (3835 MM)
Overall Width	19 11/16" (500 MM)
Overall Length	140 3/16" (3560 MM)
Weight	1,539 LBS
Dimension	116" L * 26" W * 36" H
Inside Columns	118 1/8" (3000 MM)
Drive Thru	107 1/4" (2724 MM)
Requirements	6" - 3000 PSI

Warranty

**5 YEAR LIFTING STRUCTURE
3 YEAR HYDRAULIC
2 YEAR ELECTRIC**

FEATURES

- Installation methods: Symmetric & Asymmetric
- Overhead / Clear floor design
- Single point manual release
- Direct Drive
- 2 Top limiter switch
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Rein orange (RAL 2004)

Standard Accessories (Included)

- 4pcs Screw-up rubber pads - Peg 50mm (4")
- 8pcs Truck Adaptors - 4pcs of each height 2 3/4" & 4"

Optional Accessories (Purchase Separately)

- Cradle pads(Peg 50mm)
- Tripod jack stand

**View it on the
website here:**



TECHNICAL

Model	C10P - Asymmetrical
Max Lifting Height with Adaptors	82 11/16" (2100 MM)
Min Lifting Height with Adaptors	3 15/16" (100 MM)
Max Lifting without Adaptors	76 3/4" (1950 MM)
Min Lifting without Adaptors	3 3/4" (95 MM)
Rise Time	~50SEC
Front Arm Reach Max	53 1/8" (1350 MM)
Front Arm Reach Min	33 7/16" (850 MM)
Rear Arm Reach Max	41 3/4" (1060 MM)
Rear Arm Reach Min	23 13/16" (605 MM)
Overall Height	151" (3835 MM)
Overall Width	19 11/16" (500 MM)
Overall Length	149 5/8" (3800 MM)
Weight	1539 LBS
Dimension	116" L * 26" W * 36" H

Inside Columns	115 3/8" (2930 MM)
Drive Thru	103 15/16" (2640 MM)

FEATURES

- Installation methods: Symmetric & Asymmetric
- Overhead / Clear floor design
- Single point manual release
- Direct Drive
- 2 Top limiter switch
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Rein orange (RAL 2004)

Standard Accessories (Included)

- 4pcs Screw-up rubber pads - Peg 50mm (4")
- 8pcs Truck Adaptors - 4pcs of each height 2 3/4" & 4"

Optional Accessories (Purchase Separately)

- Cradle pads(Peg 50mm)
- Tripod jack stand



**View it on the
website here:**



Warranty

**5 YEAR LIFTING STRUCTURE
3 YEAR HYDRAULIC
2 YEAR ELECTRIC**

SYMMETRICAL

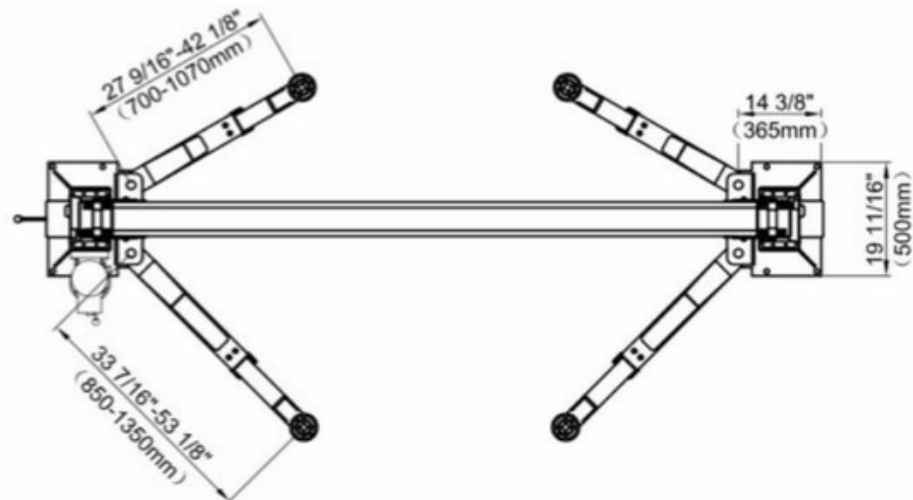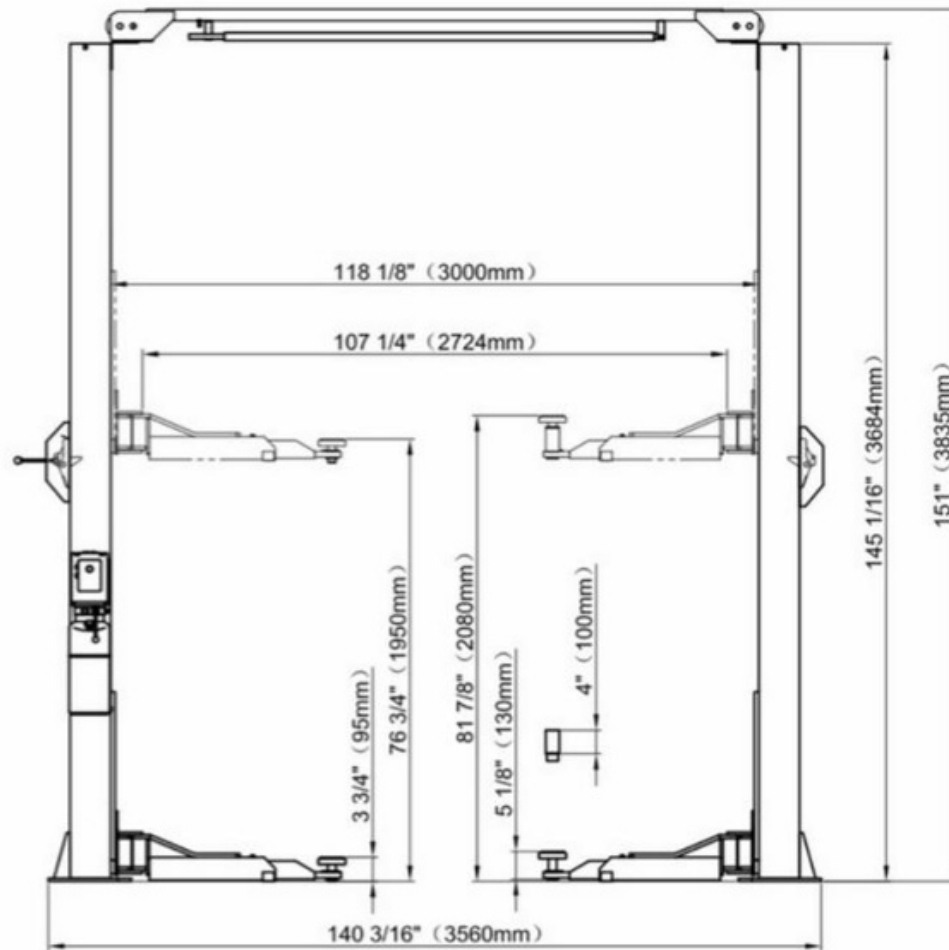

ASYMMETRICAL

