C10X

Stratus Extra Wide Asymmetric & Symmetric 2in-1 Clear Floor Direct Drive 10,000 LBS Capacity Electric Safety Lock Release Car Lift






Sales & Showroom 512-640-9896 5881 Imperial Loop Dr. College Station, TX 77845 sales@stratusautoequip.com

TECHNICAL

Model	C10X Asymmetrical
Capacity	10,000 LBS
Max Lifting Height with Adaptors	83 1/16" (2110 MM)
Min Lifting Height with Adaptors	10 1/4"(261 MM)
Max Lifting without Adaptors	76 3/4" (1950 MM)
Min Lifting without Adaptors	3 15/16" (100 MM)
Rise Time	~50SEC
Overall Height	153 9/16" (3900 MM)
Overall Width	20 1/2" (520 MM)
Overall Length	156 7/8" (3985 MM)
Inside Columns	118 1/2" (3010 MM)
Drive Thru	107 11/16" (2735 MM)
Front Arm Reach Max	68 1/2" (1740 MM)
Front Arm Reach Min	35 7/16" (900 MM)
Rear Arm Reach Max	47 9/16" (1208 MM)
Rear Arm Reach Min	23 5/8" (600 MM)

DIMENSIONS

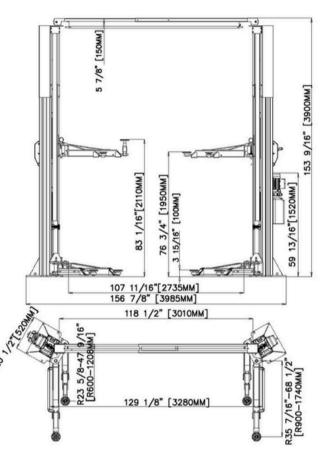

Warranty 5 YEAR LIFTING STRUCTURE 3 YEAR HYDRAULIC 2 YEAR ELECTRIC

FEATURES

- Extra wide drive through:
- -107 11/16"- Asymmetrical
- Heavy duty 14-folds columns
- Clear floor
- Symmetric & Asymmetric 2-in-1 design
- Electric safety lock release
- Direct drive
- · 2 top limiter switches
- Anti-surge valves
- Automatic arms restraints
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Rein orange (RAL 2004)

Standard Accessories (Included)

- 4pcs Screw-up rubber pads Peg 50mm
 (4")
- 4pcs 4" Truck Adaptors Peg 50mm (4")

Optional Accessories (Purchase Separately)

- Cradle pads(Peg 50mm)
- Tripod jack stand

View it on the website here:



TECHNICAL

Model	C10X - Symmetrical
Capacity	10,000 LBS
Max Lifting Height with Adaptors	83 1/16" (2110 MM)
Min Lifting Height with Adaptors	10 1/4" (261 MM)
Max Lifting without Adaptors	76 3/4" (1950 MM)
Min Lifting without Adaptors	3 15/16" (100 MM)
Rise Time	~50SEC
Overall Height	153 9/16" (3900 MM)
Overall Width	20 1/2" (520 MM)
Overall Length	150 13/16" (3830 MM)
Inside Columns	124" (3150 MM)
Drive Thru	112 3/16" (2850 MM)
Front Arm Reach Max	68 1/2" (1740 MM)
Front Arm Reach Min	35 7/16" (900 MM)
Rear Arm Reach Max	47 9/16" (1208 MM)
Rear Arm Reach Min	23 5/8" (600 MM)

Warranty 5 YEAR LIFTING STRUCTURE 3 YEAR HYDRAULIC 2 YEAR ELECTRIC

FEATURES

- Extra wide drive through:
- -112"- Symmetrical
- Heavy duty 14-folds columns
- Clear floor
- Symmetric & Asymmetric 2-in-1 design
- Electric safety lock release
- Direct drive
- 2 top limiter switches
- Anti-surge valves
- Automatic arms restraints
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Rein orange (RAL 2004)

Standard Accessories (Included)

- 4pcs Screw-up rubber pads Peg 50mm (4")
- 4pcs 4" Truck Adaptors Peg 50mm (4")

Optional Accessories (Purchase Separately)

- Cradle pads(Peg 50mm)
- Tripod jack stand

View it on the website here:



ASYMMETRICAL

