P48PC

Stratus Boxed Steel Construction & Sleeve Containment 8,000 lbs. Capacity Manual Release 4 Post Compact Mobile Compact Storage Parking Car Lift



WWW.STRATUSAUTOEQUIP.COM




Sales & Showroom

512-640-9896 5881 Imperial Loop Dr. College Station, TX 77845 sales@stratusautoequip.com

TECHNICAL

Model	P48PC
Capacity	8,000 LBS
	·
Overall Height - A	82 1/8" (2086 MM)
Overall Width - B	106 3/4" (2711 MM)
Overall Length w/ ramps - C	200 1/4" (5086 MM)
Overall Length w/o ramps - D	176 7/8" (4493 MM)
Max Lifting Height - E	70 7/8" (1800 MM)
Min Lifting Height - F	5 5/16" (135 MM)
Clearance Height - G	66 9/16" (1690 MM)
Lifting Time	~ 50SEC
Width Outside Columns - H	106 5/8" (2709 MM)
Width Inside Columns -	97" (2464 MM)
Runway width - J	18 11/16" (475 MM)
Runway Length - K	165 3/8" (4200 MM)
Width Between Runways - L	38" (965 MM)
Motor	3 HP, 110V, 60 HZ, 1PH
Oil Type / Amount	AW32 or AW46 / ~2.5 Gallons
Breaker	30A
Shipping Weight	2,023 LBS
Shipping Size	167" L * 22" W * 30" H

DIMENSIONS

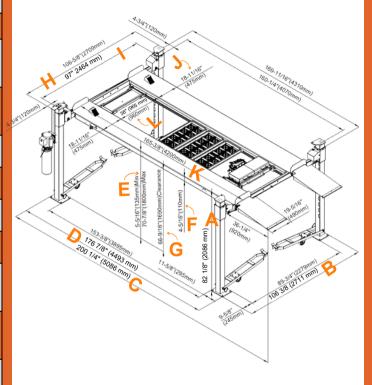

Warranty

5 YEAR LIFTING STRUCTURE 3 YEAR HYDRAULIC 2 YEAR ELECTRIC

FEATURES

- Boxed Steel Construction & Sleeve Containment
- · Hands-free lock release latch system
- Relocatable Power Unit
- Cable Failure Protection -Second safety device will be automatically locked while primary safety locks are out of operation.
- Multi-level locking positions (11 locking positions)
- Heavy-Duty Aircraft Cable (Wire Rope)
- Manual Safety Lock Release
- Skid proof diamond platform
- Proofed by dynamic test with 115% of rated capacity and static test with 150% rated capacity
- Powder coating finish: Granite Gray (RAL 7026) + Rein Orange (RAL 2004)

Standard Accessories (Included)

- Castor Kit (Set of 4)
- Rolling Jack Tray
- Drip Trays (3 pcs)
- · Wheel Chocks (2 pcs)
- Ramps (2 pcs)
- Wheel Stops (4 pcs)

Optional Add-On Accessories (Sold Separately)

- Aluminum Ramps
- Rolling Bridge Jack
- Aluminum Center Deck

View it on the website here:



